
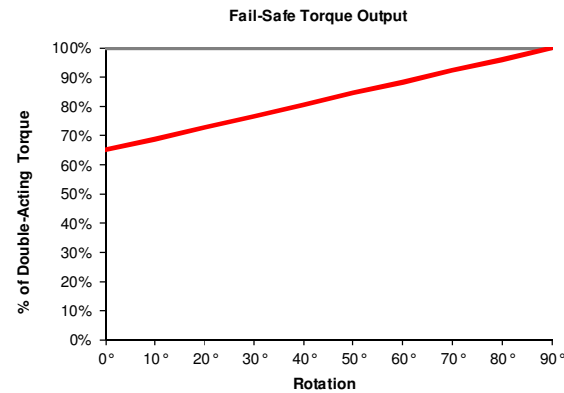


Double-Acting (In-Lb)													
Model / PSI	30	40	50	60	70	80	90	100	110	120	130	140	150
EVA-0309	73	98	122	146	171	195	220	244	269	293	317*	342*	366*
EVA-0411	144	192	240	288	336	384	433	481	529	577	625*	673*	721*
EVA-0514	286	381	477	572	667	763	858	954	1,049	1,144	1,240*	1,335*	1,430*
EVA-0717	572	763	954	1,144	1,335	1,526	1,716	1,907	2,098	2,289	2,479*	2,670*	2,861*
EVA-1022	1,144	1,526	1,907	2,289	2,670	3,051	3,433	3,814	4,196	4,577	4,958*	5,340*	5,721*
EVA-1227	2,289	3,051	3,814	4,577	5,340	6,103	6,866	7,628	8,391	9,154	9,917*	10,680*	11,443*
EVA-1436	4,577	6,103	7,628	9,154	10,680	12,205	13,731	15,257	16,782	18,308	19,834*	21,359*	22,885*

Fail-Safe (Minimum Torque At End-Of-Stroke) (In-Lb)													
Model / PSI	30	40	50	60	70	80	90	100	110	120	130	140	150
EVA-0309	48	63	79	95	111	127	143	159	175	190	206*	222*	238*
EVA-0411	94	125	156	187	219	250	281	312	344	375	406*	437*	469*
EVA-0514	186	248	310	372	434	496	558	620	682	744	806*	868*	930*
EVA-0717	372	496	620	744	868	992	1,116	1,240	1,364	1,488	1,611*	1,735*	1,859*
EVA-1022	744	992	1,240	1,488	1,735	1,983	2,231	2,479	2,727	2,975	3,223*	3,471*	3,719*
EVA-1227	1,488	1,983	2,479	2,975	3,471	3,967	4,463	4,958	5,454	5,950	6,446*	6,942*	7,438*
EVA-1436	2,975	3,967	4,958	5,950	6,942	7,933	8,925	9,917	10,909	11,900	12,892*	13,884*	14,875*

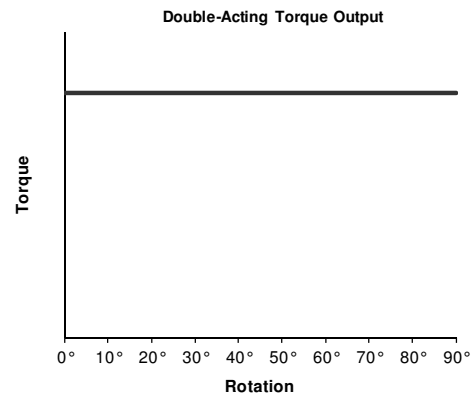

— EVA - Open / EVA - Close (full air supply, with or without electricity)
 — EVA - Close (no air supply)

Note(*): Only use with actuator's largest flange.