



Generic Input		Easytork internal use only	
Valve Brand	Marwin	Valve Brand Truncate	MW
Series	2000R	Series Truncate	2000R
Input: 1 = mm / 2 = in	2		
Safety Factor	25%		

Valve Input

Valve Torque		Direct Mount Check			Section Only For Non Direct Mount ("D.M"), Otherwise Leave Blank					Valve Dimension							
					Bracket Check		Extended Shaft Check		Buyer Preference	Valve Info	Valve Flange	Valve Dimension	Valve Stem Shape and Dimension				
Published valve torque	Incl. safety factor	Any obstruction over flange?		Possible obstruction for std. Easytork bracket?	Out. dia. of obstruction over flange surface	Are bolts for packing gland close to valve stem height?	If bolts interfere with valve stem, what is inside dia. between bolts?	If w/ bracket: How much valve stem capture?	If known, capturable valve stem height	In ISO (i.e. F05) or in	Flange to top of valve stem	Stem Shape 1 = Square 2 = Double D 3 = Bore + Key	Valve stem dimension in in or mm	V Sq - sq DD - bore b+k - bore	V1 Sq - sq DD - flat b+k - key	V2 b+k - key (leave blank if Sq or DD)	Insert orientation when valve is CLOSED. If Sq 1=diamond / 2=Square If DD or B+K 1=in line / 2=not in line  1 = Diamond or in line / 2=Square or not in line
Valve Size	in-lb	in-lb	1=Yes / 0=No	1=Yes / 0=No	in/mm	1=Yes / 0=No	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm
1"	110	138	Yes	Yes	1.190	No				F04	0.63	2	in	0.370	0.248		1
1 1/2"	220	275	Yes	Yes	1.380	No		0.500	0.61	F05	0.83	2	in	0.429	0.315		1
2"	380	475	Yes	Yes	1.380	No		0.450	0.51	F05	0.93	2	in	0.559	0.392		1
3"	900	1,125	Yes	Yes		No		0.800	0.92	F07	1.84	2	in	0.882	0.669		1
4"	1,600	2,000	Yes	Yes		No		0.800	0.98	F07	1.81	2	in	0.882	0.669		1

Notes:

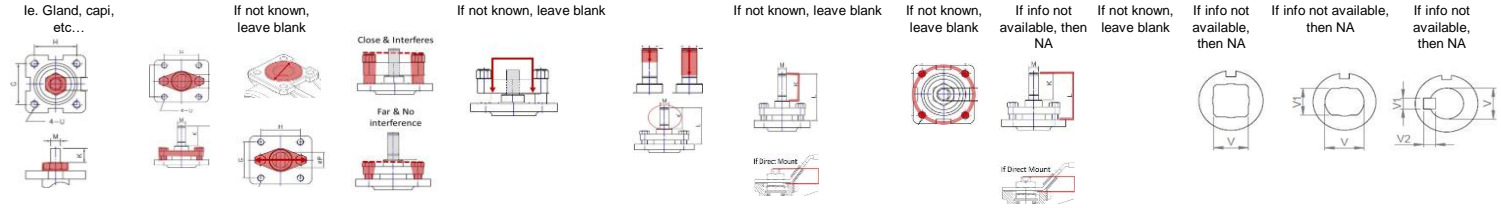

**Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.**

Valve Size	Required Actuator Range	Actuator Torque (Actual torque, no additional safety factor included)				Individual Part Order Code* (If ordered with the below order codes, Easytork will ship each part as standalone)				2017 List Price					Complete Actuator to Valve Order Code*	
		DA @ 60PSI	DA @ 80PSI	FS @ 60PSI	FS @ 80PSI	Actuator	Insert	Extended Shaft	Bracket	Actuator +	Insert +	Extended Shaft +	Bracket or Plate +	= Total Package: Actuator and hardware for mounting to valve		
1"	EVA-0309	146	195	95	127	C-A-1-11-1-111	D-112-0.370x0.248in	K-AS-1-1-1-2	TBD							
	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-212-0.370x0.248in	K-AS-2-1-1-2	TBD							
1 1/2"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-212-0.429x0.315in	K-AS-2-1-1-2	B-2-F05S-F04S-1.33in							MW.2000R.1 1/2".0411.16
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-312-0.429x0.315in	K-AS-3-1-1-2	B-2-F05S-F05S-1.83in							MW.2000R.1 1/2".0514.16
2"	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-312-0.559x0.392in	K-AS-3-1-1-2	B-2-F05M-F05M-1.98in							MW.2000R.2".0514.16
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-412-0.559x0.392in	K-AS-4-1-1-2	B-2-F05M-F07M-1.98in							MW.2000R.2".0717.16
3"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-412-0.882x0.669in	K-AS-4-1-1-2	#VALUE!							MW.2000R.3".0717.16
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-512-0.882x0.669in	K-AS-5-1-1-2	#VALUE!							MW.2000R.3".1022.16
4"	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-512-0.882x0.669in	K-AS-5-1-1-2	#VALUE!							MW.2000R.4".1022.16
	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-612-0.882x0.669in	K-AS-6-1-1-2	#VALUE!							MW.2000R.4".1227.16

Easytork will ship the actuator, insert, extended shaft, and bracket unassembled in one SKU box.

Refer to [Assembly & Labor tab](#) if buyer wants Easytork to assemble items together.

**Disclaimer:** Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.

**Note\*:** Only for actuator and hardware required for mounting to valve. Order auxiliary add-ons (e.g., solenoid valve, lockout & PST, limit switch, chemical resistant adder, etc.) separately. If buyer requires assembly of auxiliary add-ons and/or valve, labor will be charged separately.