



Generic Input		Easytork internal use only	
Valve Brand	Flowseal	Valve Brand Truncate	FS
Series	300#	Series Truncate	300#
Input: 1 = mm / 2 = in	2		
Safety Factor	25%		

Actuator Design Year   16

Valve Input

Valve Torque		Direct Mount Check		Section Only For Non Direct Mount ("D.M"), Otherwise Leave Blank						Valve Dimension							
				Bracket Check		Extended Shaft Check		Buyer Preference		Valve Info		Valve Flange Dimension		Valve Stem Shape and Dimension			Insert orientation when valve is CLOSED. If Sq 1=diamond / 2=Square If DD or B+K 1=in line / 2=not in line  1 = Diamond or in line / 2=Square or not in line
Published valve torque	Incl. safety factor	Any obstruction over flange?	Possible obstruction for std. Easytork bracket?	Out. dia. of obstruction over flange surface	Are bolts for packing gland close to valve stem height?	If bolts interfere with valve stem, what is inside dia. between bolts	If w/ bracket: How much valve stem capture?	If known, capturable valve stem height	In SQ Dimension	Flange to top of valve stem	Stem Shape 1 = Square 2 = Double D 3 = Bore + Key	Valve stem dimension in in or mm	V Sq - sq DD - bore b+k - bore	V1 Sq - sq DD - flat b+k - key	V2 b+k - key (leave blank if Sq or DD)		
Valve Size	in-lb	in-lb	1=Yes / 0=No	1=Yes / 0=No	in/mm	1=Yes / 0=No	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm		
2"		0	Yes	Yes	3.130	No			1.15	2.25	3.34	3	in	0.500	0.188	0.188	1
2 1/2"		0	Yes	Yes	3.130	No			1.15	2.25	3.34	3	in	0.500	0.188	0.188	1
3"	220	275	Yes	Yes	3.130	No			1.41	2.25	3.60	3	in	0.625	0.188	0.188	1
3 1/2"		0	Yes	Yes	3.130	No			1.41	2.25	3.60	3	in	0.625	0.188	0.188	1
4"	250	313	Yes	Yes	3.130	No			1.48	2.25	3.67	3	in	0.625	0.188	0.188	1
5"		0	Yes	Yes	3.130	No			1.62	2.25	3.81	3	in	0.750	0.250	0.250	1
6"	600	750	Yes	Yes	3.130	No			1.62	2.25	3.81	3	in	1.000	0.375	0.375	1
8"	1,000	1,250	Yes	Yes	3.880	No			1.90	3.25	4.09	3	in	1.250	0.375	0.375	1
10"	1,800	2,250	Yes	Yes	3.880	No			2.65	3.25	4.84	3	in	1.500	0.375	0.375	1
12"	2,790	3,488	Yes	Yes	3.880	No			2.90	4.25	6.90	3	in	1.750	0.500	0.500	1
14"	4,130	5,163	Yes	Yes	5.000	No			3.35	4.25	7.36	3	in	2.000	0.500	0.500	1
		0															
		0															
		0															
		0															
		0															
		0															
		0															
		0															

Notes:

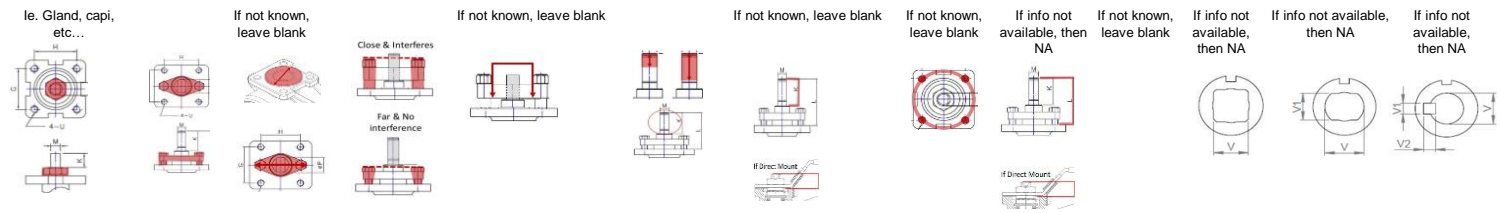

**Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.**

Valve Size	Required Actuator Range	Actuator Torque (Actual torque, no additional safety factor included)				Individual Part Order Code* (If ordered with the below order codes, Easytork will ship each part as standalone)				2017 List Price					Complete Actuator to Valve Order Code*
		DA @ 60PSI	DA @ 80PSI	FS @ 60PSI	FS @ 80PSI	Actuator	Insert	Extended Shaft	Bracket	Actuator +	Insert +	Extended Shaft +	Bracket or Plate +	= Total Package: Actuator and hardware for mounting to valve	
2"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-213-0.500x0.188x0.188in		B-2-2.25SQ-F04M-2.63in						FS.300#.2".0411.16
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-313-0.500x0.188x0.188in		B-2-2.25SQ-F07M-2.63in						FS.300#.2".0514.16
2 1/2"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-213-0.500x0.188x0.188in		B-2-2.25SQ-F04M-2.63in						FS.300#.2 1/2".0411.16
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-313-0.500x0.188x0.188in		B-2-2.25SQ-F07M-2.63in						FS.300#.2 1/2".0514.16
3"	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-313-0.625x0.188x0.188in		B-2-2.25SQ-F07M-2.83in						FS.300#.3".0514.16
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-313-0.625x0.188x0.188in		B-2-2.25SQ-F07M-2.83in						FS.300#.3".0514.16
3 1/2"	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-313-0.625x0.188x0.188in		B-2-2.25SQ-F07M-2.83in						FS.300#.3 1/2".0514.16
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-413-0.625x0.188x0.188in		B-2-2.25SQ-F07M-2.63in						FS.300#.3 1/2".0717.16
4"	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-313-0.625x0.188x0.188in		B-2-2.25SQ-F07M-2.83in						FS.300#.4".0514.16
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-413-0.625x0.188x0.188in		B-2-2.25SQ-F07M-2.63in						FS.300#.4".0717.16
5"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-413-0.750x0.250x0.250in		B-2-2.25SQ-F07M-2.83in						FS.300#.5".0717.16
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-413-0.750x0.250x0.250in		B-2-2.25SQ-F07M-2.83in						FS.300#.5".0717.16
6"	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-513-1.000x0.375x0.375in		B-2-2.25SQ-F07M-2.63in						FS.300#.6".1022.16
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-513-1.000x0.375x0.375in		B-2-2.25SQ-F07M-2.63in						FS.300#.6".1022.16
8"	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.250x0.375x0.375in		B-2-3.25SQ-F10L-2.60in						FS.300#.8".1227.16
	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.250x0.375x0.375in		B-2-3.25SQ-F10L-2.60in						FS.300#.8".1227.16
10"	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.500x0.375x0.375in		B-2-3.25SQ-F12L-3.27in						FS.300#.10".1227.16
	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.500x0.375x0.375in		B-2-3.25SQ-F12L-3.27in						FS.300#.10".1227.16
12"	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.750x0.500x0.500in		Special						FS.300#.12".1227.16
	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-713-1.750x0.500x0.500in		Special						FS.300#.12".1436.16
14"	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-713-2.000x0.500x0.500in		Special						FS.300#.14".1436.16
	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-713-2.000x0.500x0.500in		Special						FS.300#.14".1436.16

Easytork will ship the actuator, insert, extended shaft, and bracket unassembled in one SKU box.

Refer to [Assembly & Labor tab](#) if buyer wants Easytork to assemble items together.

**Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.**

**Note\*: Only for actuator and hardware required for mounting to valve. Order auxiliary add-ons (e.g., solenoid valve, lockout & PST, limit switch, chemical resistant adder, etc.) separately. If buyer requires assembly of auxiliary add-ons and/or valve, labor will be charged separately.**