

Generic Input		Easytork internal use only	
Valve Brand	J Flow	Valve Brand Truncate	JF
Series	DM-CF7300	Series Truncate	CF7300
Input: 1 = mm / 2 = in	2		
Safety Factor	25%		



Actuator Design Year

16

Valve Input

Valve Torque				Section Only For Non Direct Mount ("D.M"), Otherwise Leave Blank						Valve Dimension								
Direct Mount Check				Bracket Check		Extended Shaft Check		Buyer Preference		Valve Info		Valve Flange		Valve Dimension		Valve Stem Shape and Dimension		
Published valve torque	Incl. safety factor	Any obstruction over flange?	1=Yes / 0=No	Possible obstruction for std. Easytork bracket?	Out. dia. of obstruction over flange surface	Are bolts for packing gland close to valve stem height?	If bolts interfere with valve stem, what is inside dia. between bolts?	If w/ bracket: How much valve stem capture?	If known, capturable valve stem height	In ISO (i.e. F05)	Flange to top of valve stem	Stem Shape	Valve stem dimension in in or mm	V	V1	V2	Insert orientation when valve is CLOSED. If Sq 1=diamond / 2=square If DD or B+K 1=in line / 2=not in line	
in-lb	in-lb			1=Yes / 0=No	in/mm	1=Yes / 0=No	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	1 = Diamond or in line / 2=Square or not in line
1/2"	75	94	No								F03	0.35	1	in	0.350	0.350		1
3/4"	100	125	No								F03	0.35	1	in	0.350	0.350		1
1"	150	188	No								F05	0.43	1	in	0.430	0.430		1
1 1/2"	250	313	No								F05	0.55	1	in	0.550	0.550		1
2"	300	375	No								F05	0.55	1	in	0.550	0.550		1
2 1/2"	450	563	No								F07	0.67	1	in	0.670	0.670		1
3"	700	875	No								F10	0.67	1	in	0.670	0.670		1
4"	1,000	1,250	No								F10	0.67	1	in	0.670	0.670		1
		0																
		0																
		0																
		0																
		0																
		0																
		0																
		0																
		0																
		0																
		0																
		0																

Notes:

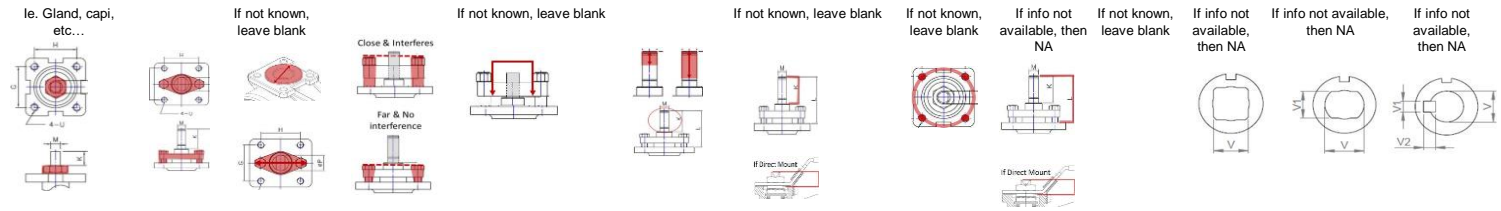

Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.

		Actuator Torque				Individual Part Order Code* (If ordered with the below order codes, Easytork will ship each part as standalone)				2017 List Price					Complete Actuator to Valve Order Code*
Valve Size	Required Actuator Range	DA @ 60PSI	DA @ 80PSI	FS @ 60PSI	FS @ 80PSI	Actuator	Insert	Extended Shaft	Bracket	Actuator +	Insert +	Extended Shaft +	Bracket or Plate +	= Total Package: Actuator and hardware for mounting to valve	
1/2"	EVA-0309	146	195	95	127	C-A-1-11-1-111									JF.CF7300.1/2".0309.16
	EVA-0309	146	195	95	127	C-A-1-11-1-111									JF.CF7300.1/2".0309.16
3/4"	EVA-0309	146	195	95	127	C-A-1-11-1-111									JF.CF7300.3/4".0309.16
	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-211-0.350x0.350in								JF.CF7300.3/4".0411.16
1"	EVA-0411	288	384	187	250	C-A-2-11-1-111									JF.CF7300.1".0411.16
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-311-0.430x0.430in								JF.CF7300.1".0514.16
1 1/2"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-211-0.550x0.550in								JF.CF7300.1 1/2".0411.16
	EVA-0514	572	763	372	496	C-A-3-11-1-111									JF.CF7300.1 1/2".0514.16
2"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-211-0.550x0.550in								JF.CF7300.2".0411.16
	EVA-0514	572	763	372	496	C-A-3-11-1-111									JF.CF7300.2".0514.16
2 1/2"	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-311-0.670x0.670in								JF.CF7300.2 1/2".0514.16
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111									JF.CF7300.2 1/2".0717.16
3"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111									JF.CF7300.3".0717.16
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-511-0.670x0.670in								JF.CF7300.3".1022.16
4"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111									JF.CF7300.4".0717.16
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-511-0.670x0.670in								JF.CF7300.4".1022.16

Easytork will ship the actuator, insert, extended shaft, and bracket unassembled in one SKU box.

Refer to [Assembly & Labor](#) tab if buyer wants Easytork to assemble items together.

Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.

Note*: Only for actuator and hardware required for mounting to valve. Order auxiliary add-ons (e.g., solenoid valve, lockout & PST, limit switch, chemical resistant adder, etc.) separately. If buyer requires assembly of auxiliary add-ons and/or valve, labor will be charged separately.