
EVA0717-F05/F07/F10
Technical Data
Direct Mount

Easytork

MOUNTING DIMENSIONS PER
ISO 5211-2001(E)
DIN 3337(OPTIONAL)
NAMUR VDI/VDE 3845

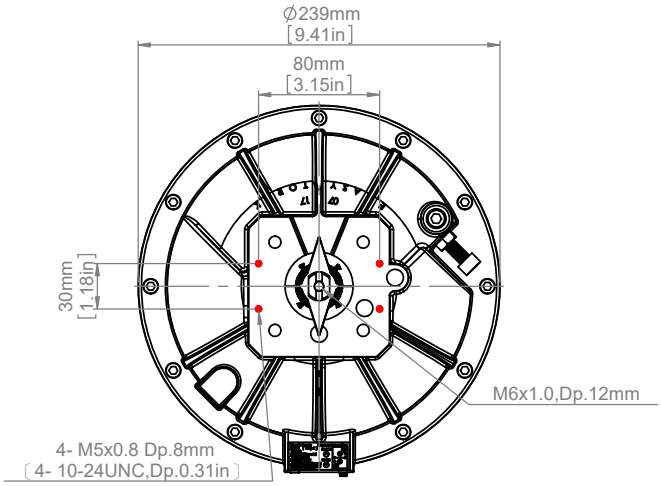

Specifications:

1. Output Torque
DA 158.7 Nm @ 5.5 bar / 1409 in-lb @ 80 psi
FS 110.7 Nm @ 5.5 bar / 983 in-lb @ 80 psi


2. Temperature Rating
-20°C to 80°C / -4°F to 176°F


3. Pressure Rating
Up to 10 bar (150 psi)


4. Weight
5.8 kg / 12.7 lb


5. Displaced Air Volume Per Stroke
0.6 L / 36.6 in^3

6. Travel Adjustment
+/- 5° per stopper bolt for standard

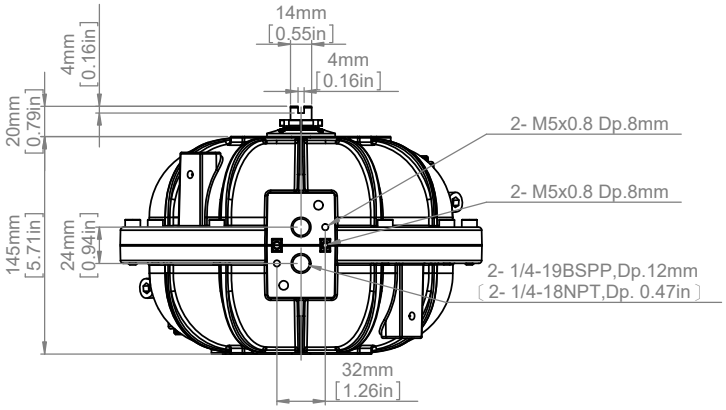


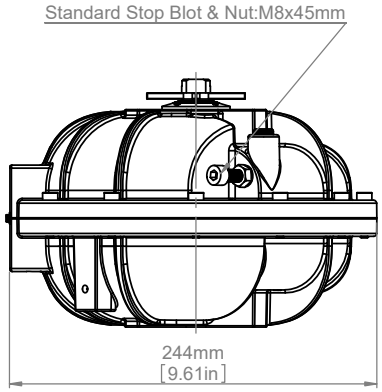

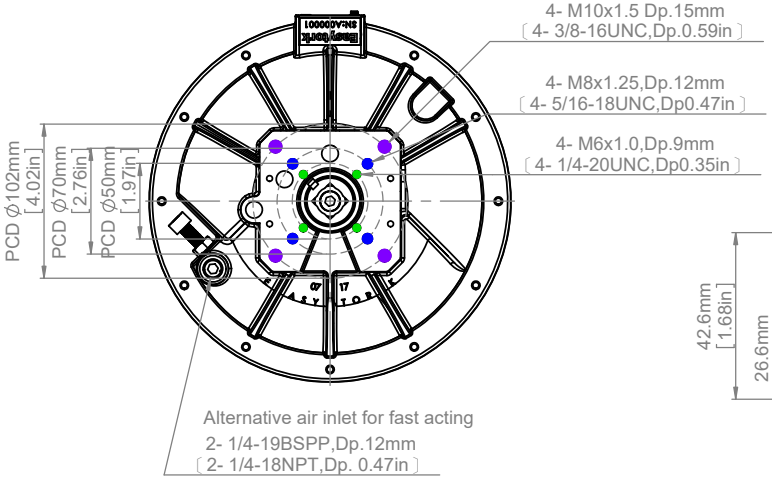

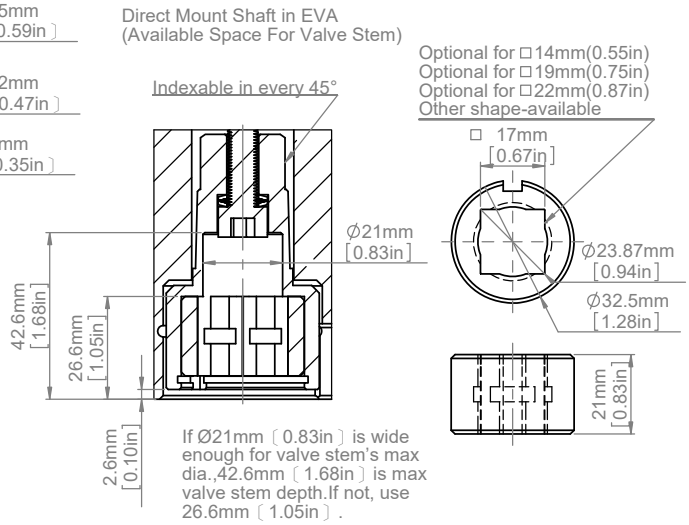


Actuator shown in full CW position
Ancillaries attachment size AA1

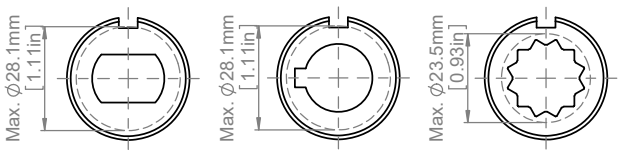

EVA0717-3.25"
Technical Data
Direct Mount

MOUNTING DIMENSIONS PER
ISO 5211-2001(E)
DIN 3337(OPTIONAL)
KEYSTONE MOUNTING STANDARD
NAMUR VDI/VDE 3845

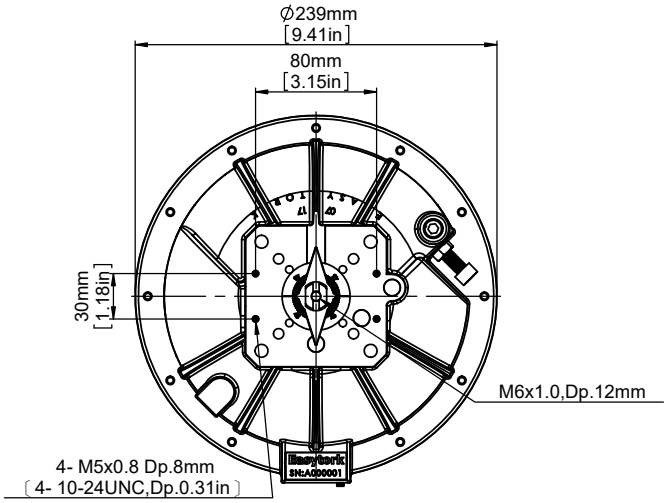

Specifications:

1. Output Torque
DA 158.7 Nm @ 5.5 bar / 1409 in-lb @ 80 psi
FS 110.7 Nm @ 5.5 bar / 983 in-lb @ 80 psi


2. Temperature Rating
-20°C to 80°C / -4°F to 176°F


3. Pressure Rating
Up to 10 bar (150 psi)


4. Weight
5.8 kg / 12.7 lb

5. Displaced Air Volume Per Stroke
0.6 L / 36.6 in^3

6. Travel Adjustment
+/- 5° per stopper bolt for standard

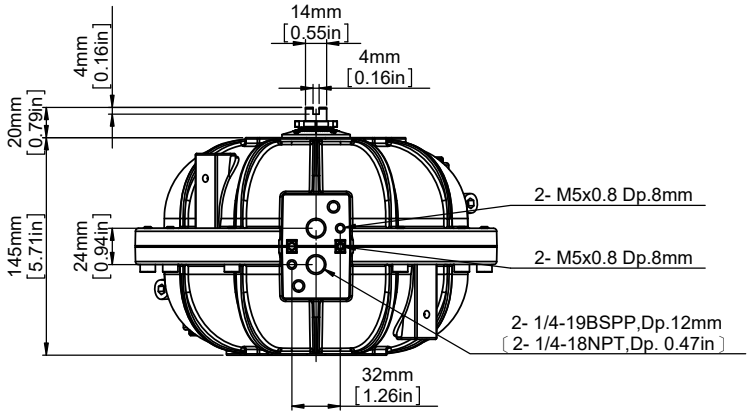

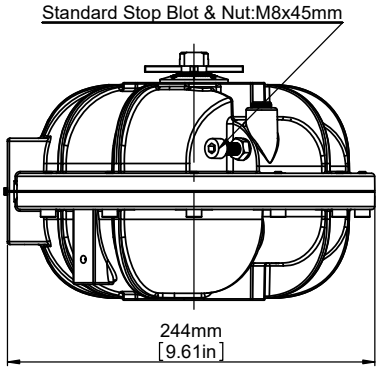

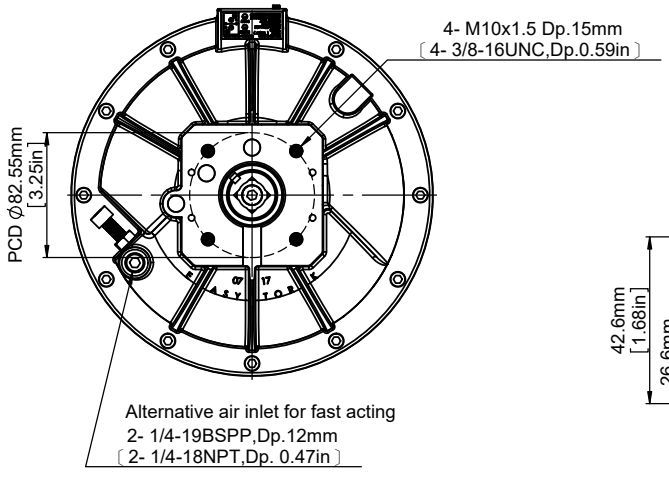

Actuator shown in full CW position
Ancillaries attachment size AA1

