
EVA1646-F16/6.5"/F25
Technical Data-Imperial
Direct Mount

Easytork

MOUNTING DIMENSIONS PER
ISO 5211-2001(E)
DIN 3337(OPTIONAL)
KEYSTONE MOUNTING STANDARD
NAMUR VDI/VDE 3845

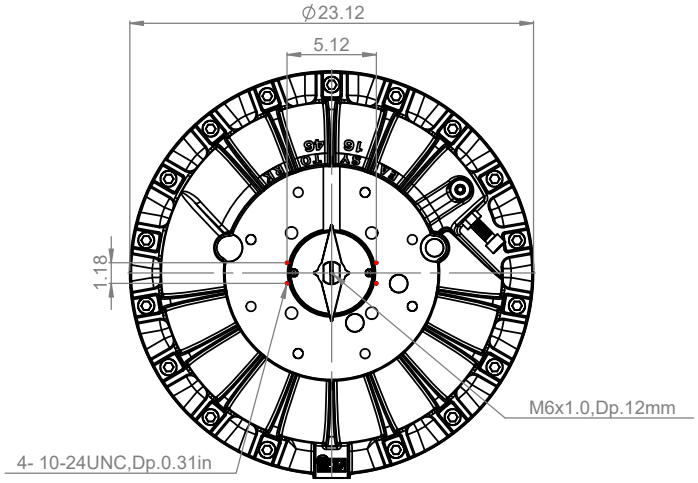

Specifications:

1. Output Torque
DA 2537 Nm @ 5.5 bar / 22519 in-lb @ 80 psi
FS 1698 Nm @ 5.5 bar / 15072 in-lb @ 80 psi


2. Temperature Rating
-20°C to 80°C / -4°F to 176°F


3. Pressure Rating
Up to 10 bar (150 psi)


4. Weight
75.6 kg / 166.7 lb

5. Displaced Air Volume Per Stroke
9.6 L / 585.8 in^3


6. Travel Adjustment
+/- 5° per stopper bolt for standard

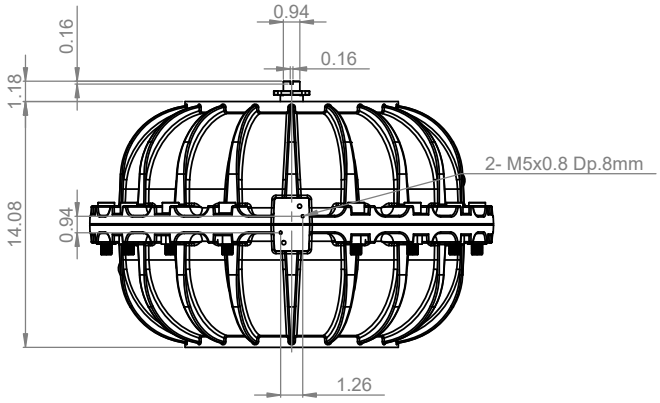

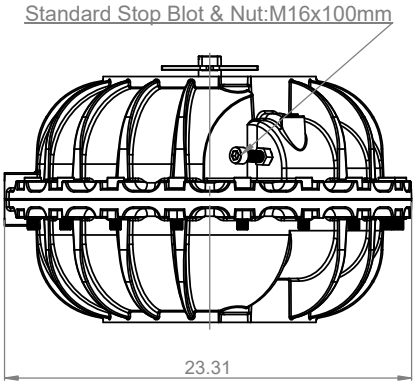

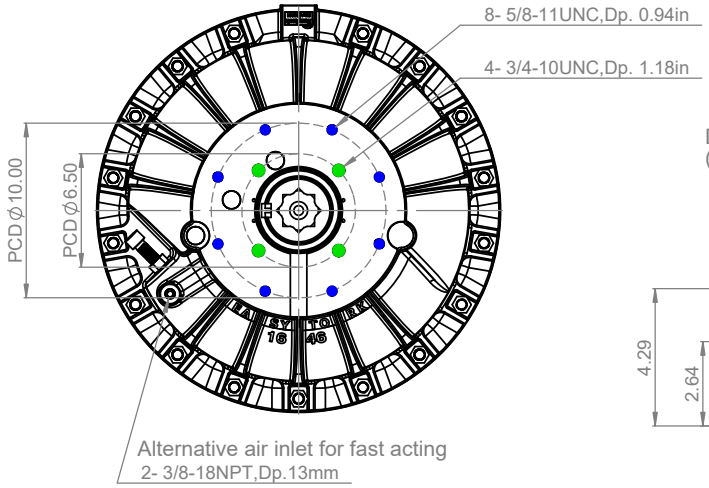

Actuator shown in full CW position
Ancillaries attachment size AA3

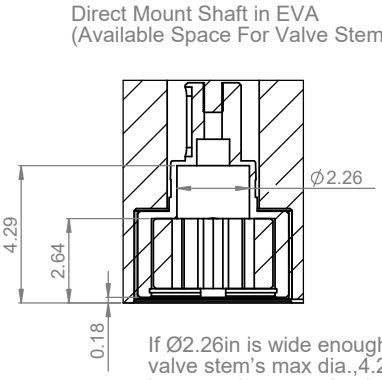

If Ø2.26in is wide enough for valve stem's max dia.,4.29in is max valve stem depth.If not, use 2.64in.

