
EVA1436-F12/F16/6.5"
Technical Data-Imperial
Direct Mount

Easytork

MOUNTING DIMENSIONS PER
ISO 5211-2001(E)
DIN 3337(OPTIONAL)
KEYSTONE MOUNTING STANDARD
NAMUR VDI/VDE 3845

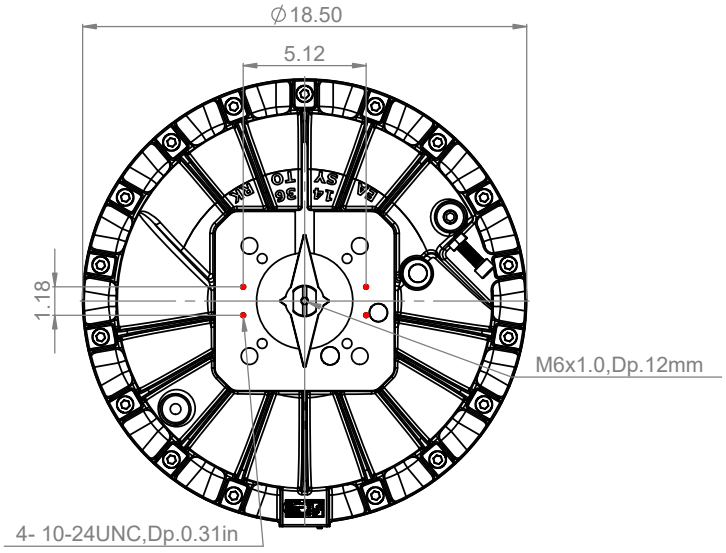

Specifications:

1. Output Torque
DA 1212 Nm @ 5.5 bar / 10758 in-lb @ 80 psi
FS 810 Nm @ 5.5 bar / 7190 in-lb @ 80 psi


2. Temperature Rating
-20°C to 80°C / -4°F to 176°F


3. Pressure Rating
Up to 10 bar (150 psi)


4. Weight
39.1 kg / 86.1 lb


5. Displaced Air Volume Per Stroke
4.8 L / 292.9 in^3

6. Travel Adjustment
+/- 5° per stopper bolt for standard

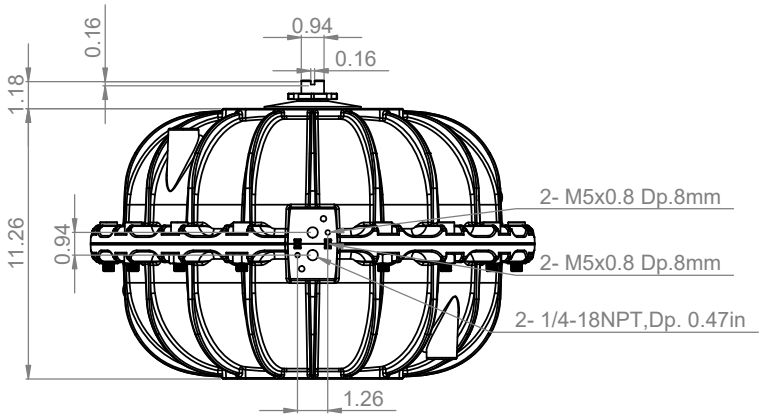


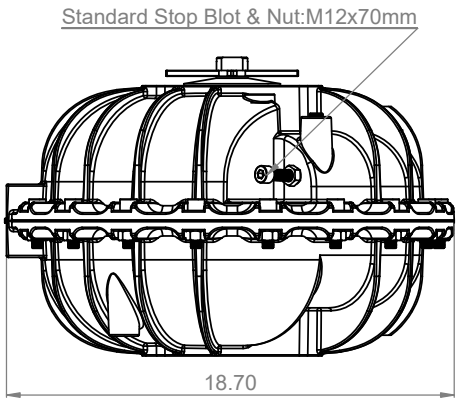

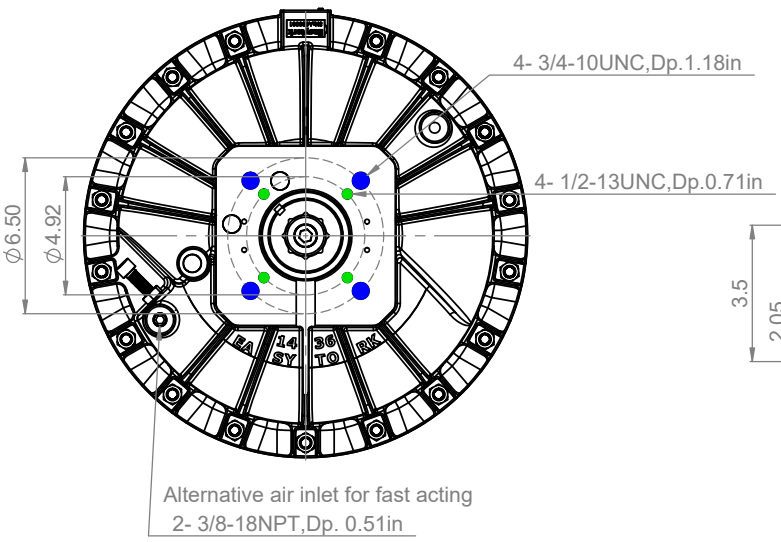

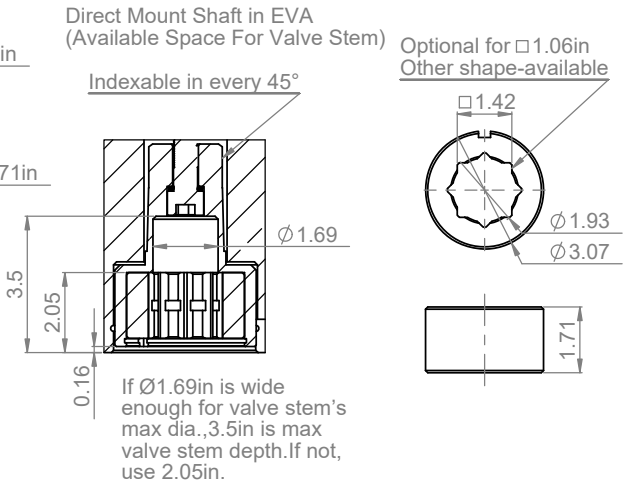


Actuator shown in full CW position
Ancillaries attachment size AA3

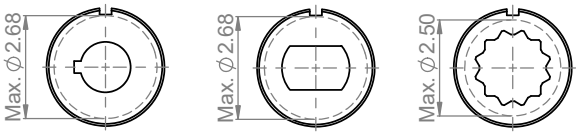

EVA1436-5"/6.5"
Technical Data-Imperial
Direct Mount

Easytork

MOUNTING DIMENSIONS PER
ISO 5211-2001(E)
DIN 3337(OPTIONAL)
KEYSTONE MOUNTING STANDARD
NAMUR VDI/VDE 3845

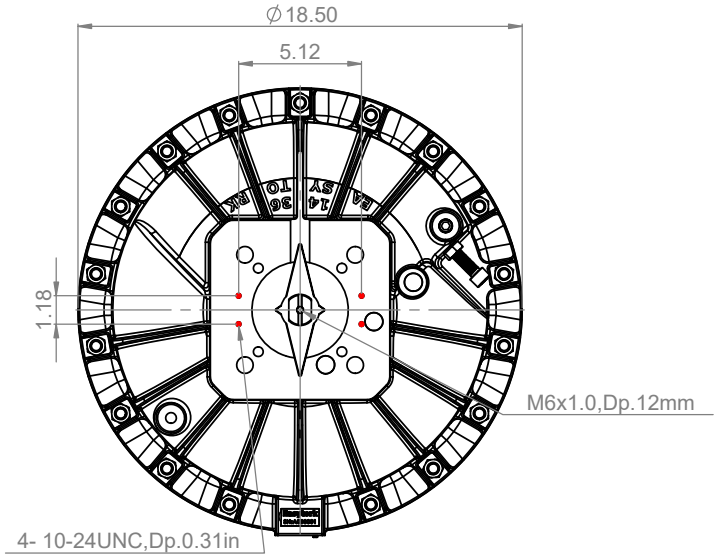

Specifications:

1. Output Torque
DA 1212 Nm @ 5.5 bar / 10758 in-lb @ 80 psi
FS 810 Nm @ 5.5 bar / 7190 in-lb @ 80 psi


2. Temperature Rating
-20°C to 80°C / -4°F to 176°F


3. Pressure Rating
Up to 10 bar (150 psi)


4. Weight
39.1 kg / 86.1 lb


5. Displaced Air Volume Per Stroke
4.8 L / 292.9 in^3

6. Travel Adjustment
+/- 5° per stopper bolt for standard

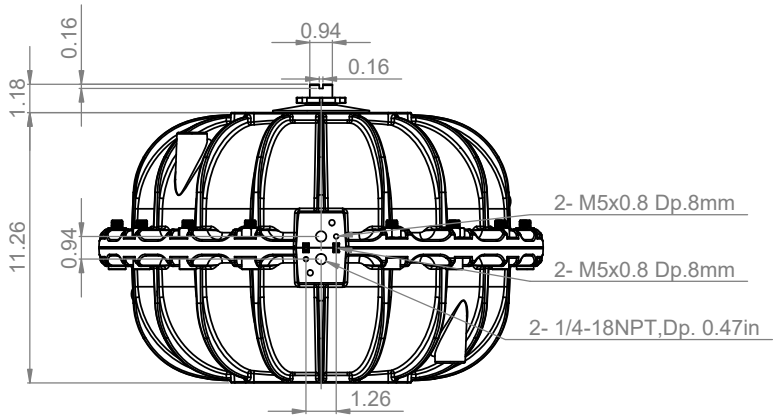

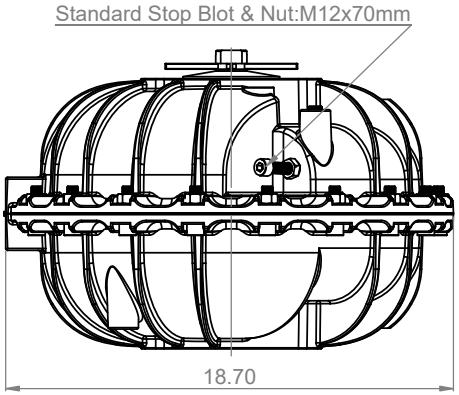

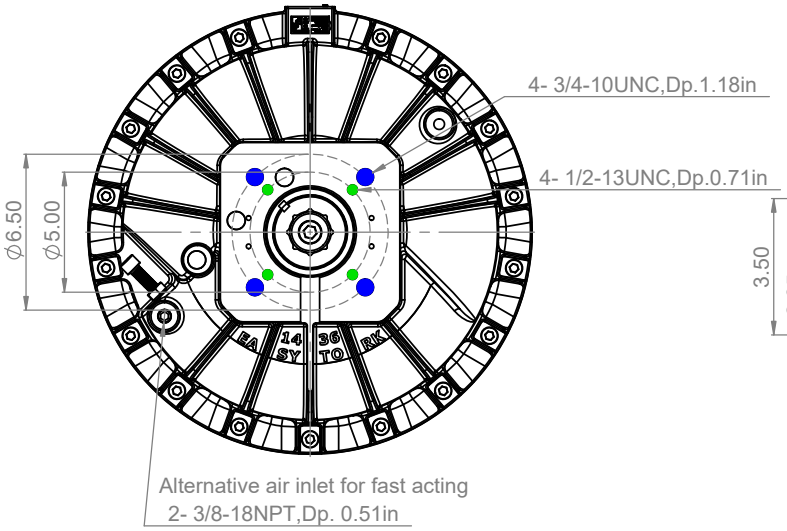

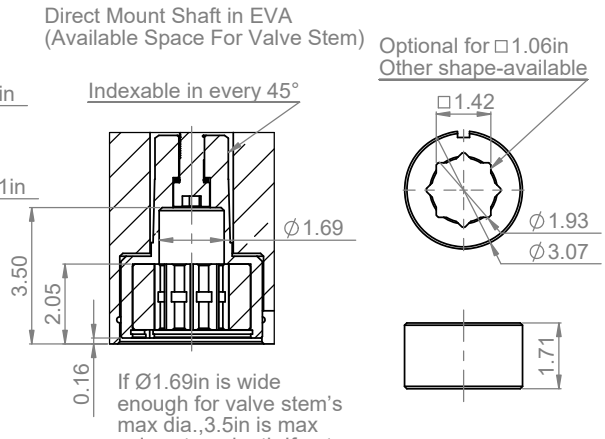

Actuator shown in full CW position
Ancillaries attachment size AA3

