
EVA0514-F05/F07
Technical Data
Direct Mount

Easytork

MOUNTING DIMENSIONS PER
ISO 5211-2001(E)
DIN 3337(OPTIONAL)
NAMUR VDI/VDE 3845

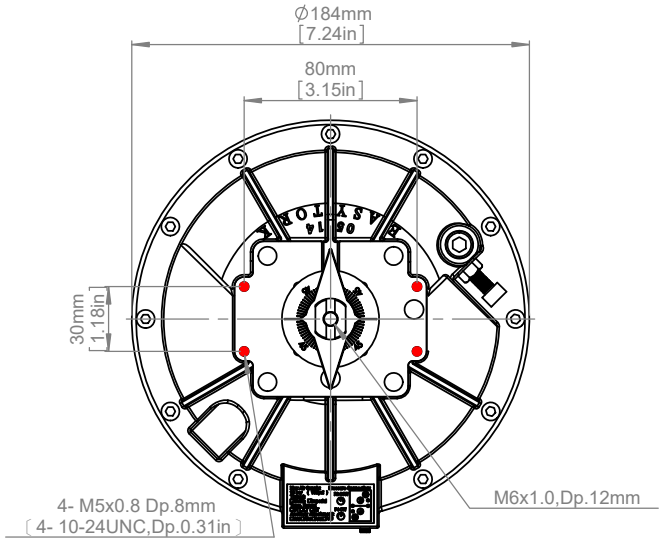

Specifications:

1. Output Torque
DA 72.1 Nm @ 5.5 bar / 640 in-lb @ 80 psi
FS 47.4 Nm @ 5.5 bar / 420 in-lb @ 80 psi


2. Temperature Rating
-20°C to 80°C / -4°F to 176°F


3. Pressure Rating
Up to 10 bar (150 psi)


4. Weight
2.8 kg / 6.1 lb


5. Displaced Air Volume Per Stroke
0.3 L / 18.3 in^3

6. Travel Adjustment
+/- 5° per stopper bolt for standard

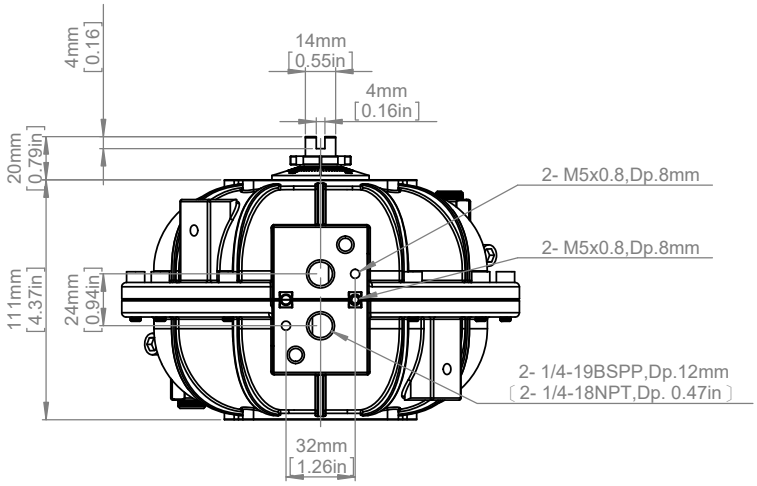


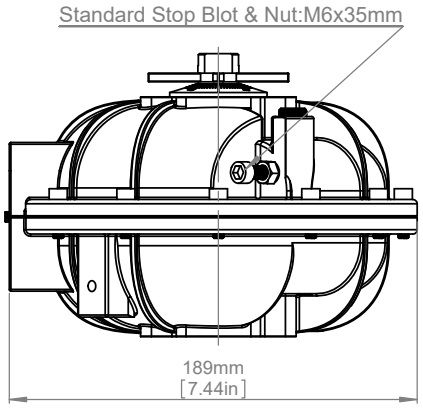

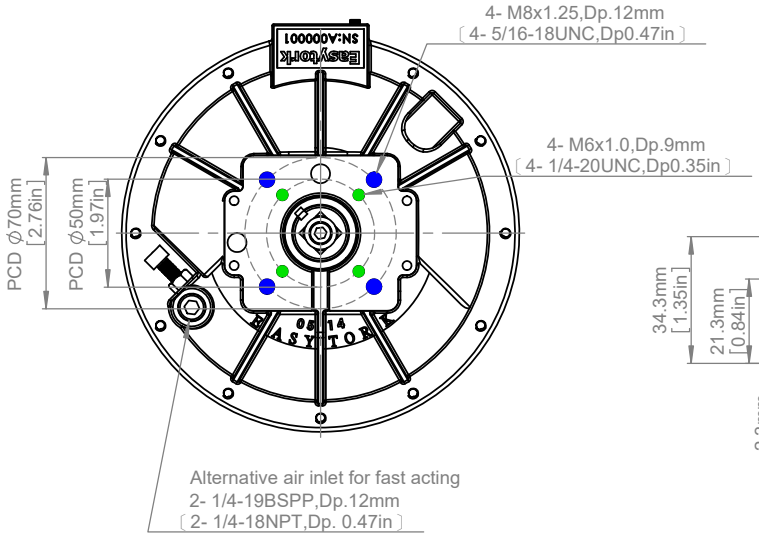

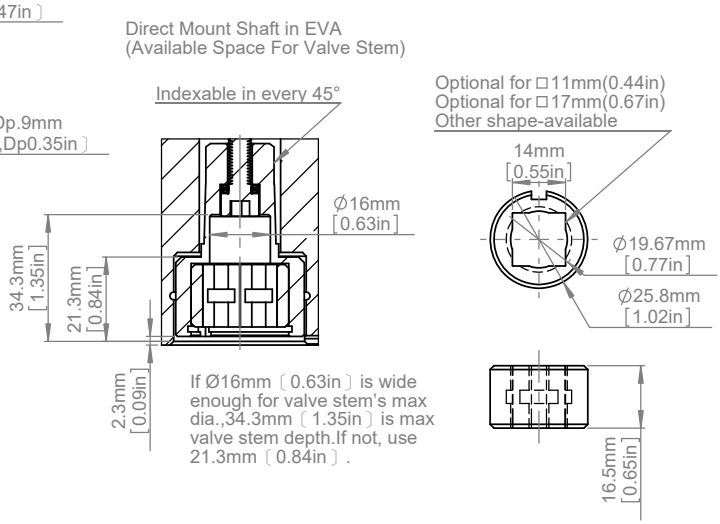


Actuator shown in full CW position
Ancillaries attachment size AA1

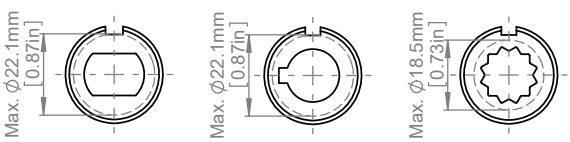

EVA0514-F04/3.25"
Technical Data
Direct Mount

Easytork

MOUNTING DIMENSIONS PER
ISO 5211-2001(E)
DIN 3337(OPTIONAL)
KEYSTONE MOUNTING STANDARD
NAMUR VDI/VDE 3845

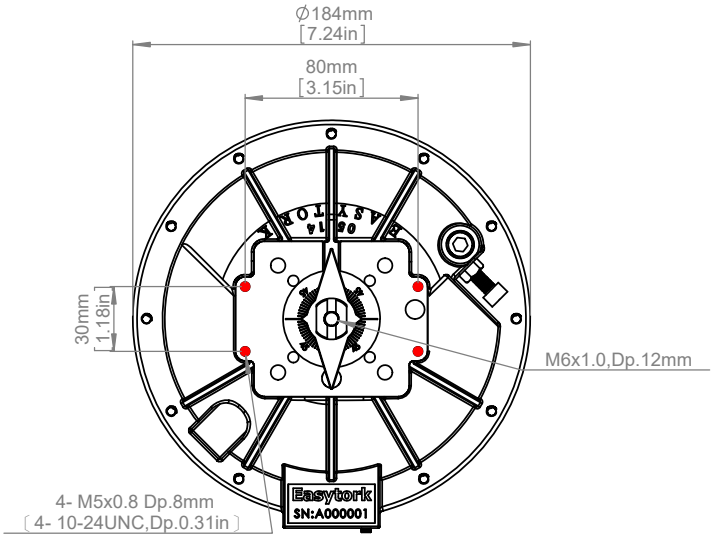

Specifications:

1. Output Torque
DA 72.1 Nm @ 5.5 bar / 640 in-lb @ 80 psi
FS 47.4 Nm @ 5.5 bar / 420 in-lb @ 80 psi


2. Temperature Rating
-20°C to 80°C / -4°F to 176°F


3. Pressure Rating
Up to 10 bar (150 psi)


4. Weight
2.8 kg / 6.1 lb

5. Displaced Air Volume Per Stroke
0.3 L / 18.3 in^3

6. Travel Adjustment
+/- 5° per stopper bolt for standard

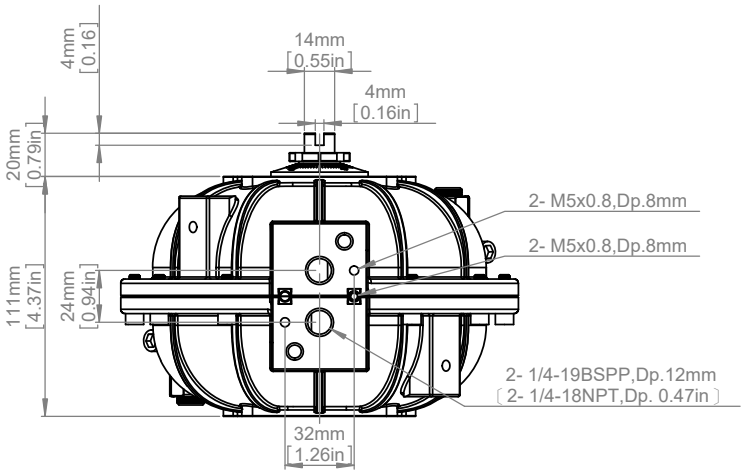

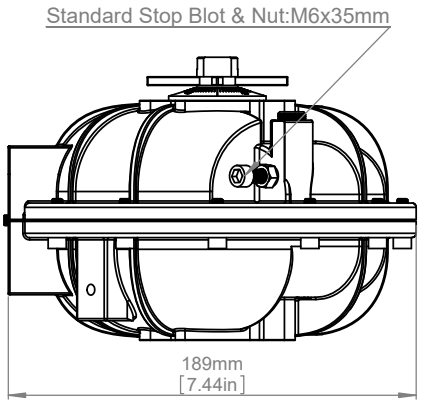

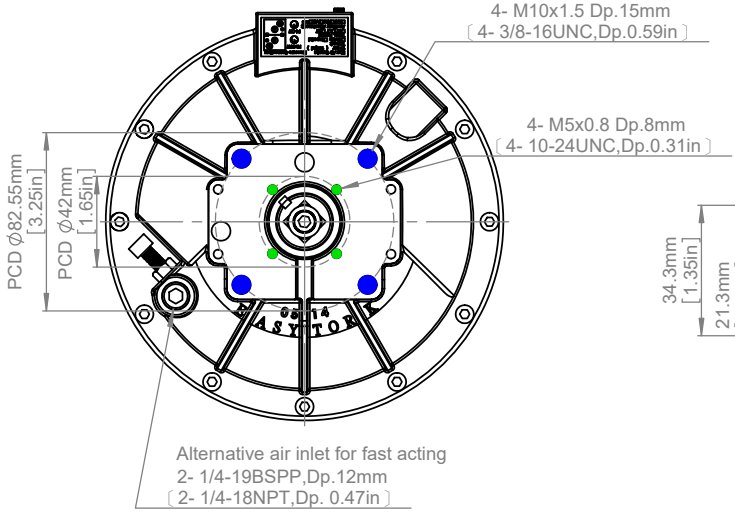

Actuator shown in full CW position
Ancillaries attachment size AA1

