

EVA1022-F07/F10/F12
Technical Data
Direct Mount

Easytork

MOUNTING DIMENSIONS PER
 ISO 5211-2001(E)
 DIN 3337(OPTIONAL)
 NAMUR VDI/VDE 3845

Specifications:

1. Output Torque

DA 326.2 Nm @ 5.5 bar / 2895 in-lb @ 80 psi
 FS 221.1 Nm @ 5.5 bar / 1963 in-lb @ 80 psi

2. Temperature Rating

-20°C to 80°C / -4°F to 176°F

3. Pressure Rating

Up to 10 bar (150 psi)

4. Weight




10.5 kg / 23.1 lb

5. Displaced Air Volume Per Stroke


1.2 L / 73.2 in³

6. Travel Adjustment


+/- 5° per stopper bolt for standard

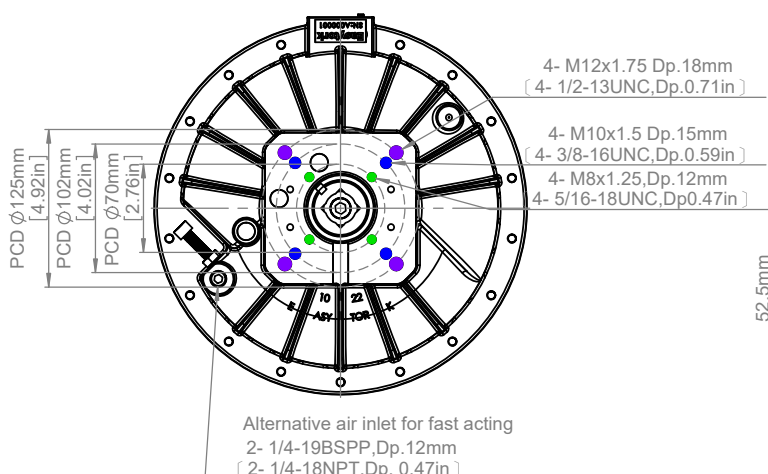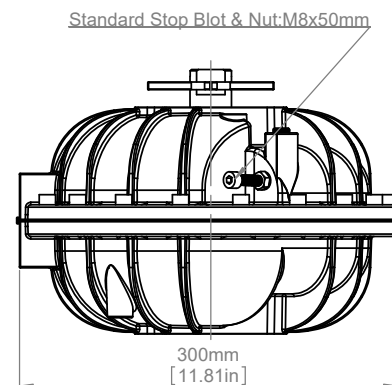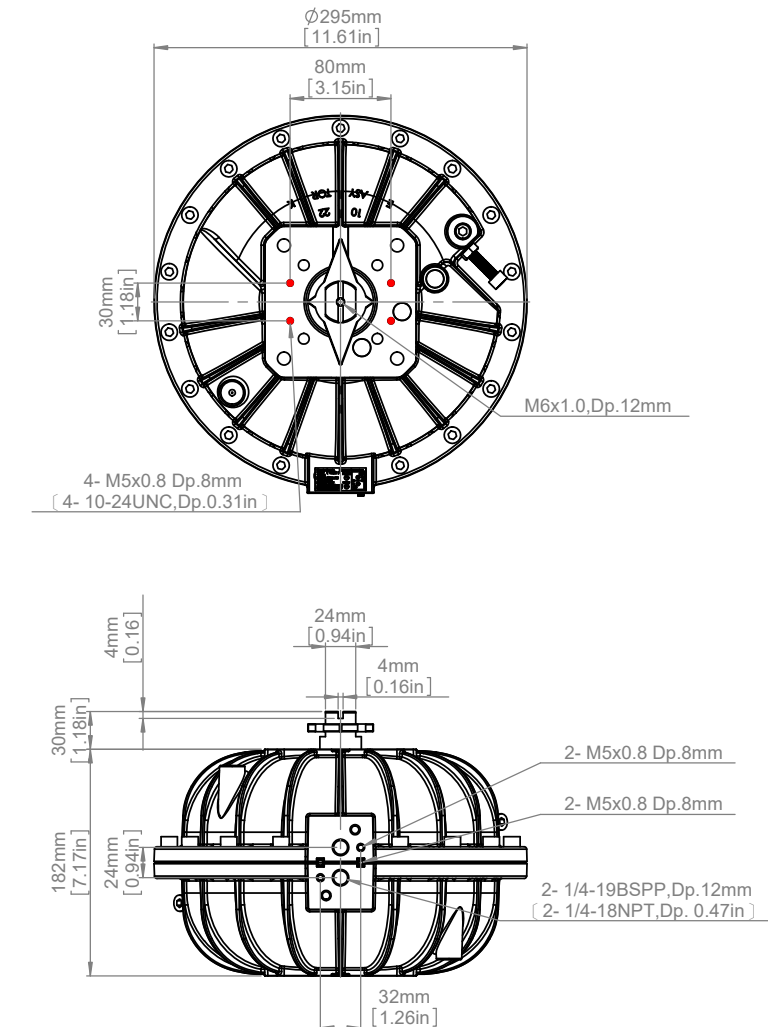


Direct Mount Shaft in EVA
 (Available Space For Valve Stem)

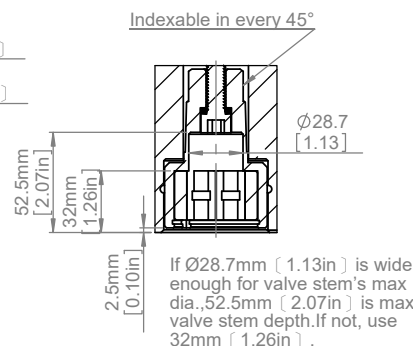

Optional for $\square 17\text{mm}$ (0.67in)
 Optional for $\square 19\text{mm}$ (0.75in)
 Optional for $\square 27\text{mm}$ (1.06in)
 Other shape-available



Actuator shown in full CW position
 Ancillaries attachment size AA2

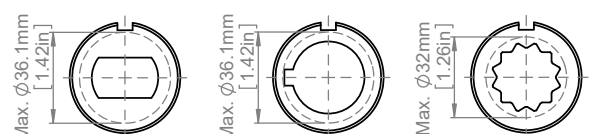




EVA1022-3.25"/5"
Technical Data
Direct Mount

Easytork


MOUNTING DIMENSIONS PER
 ISO 5211-2001(E)
 DIN 3337(OPTIONAL)
 KEYSTONE MOUNTING STANDARD
 NAMUR VDI/VDE 3845

Specifications:


- 1. Output Torque**
 DA 326.2 Nm @ 5.5 bar / 2895 in-lb @ 80 psi
 FS 221.1 Nm @ 5.5 bar / 1963 in-lb @ 80 psi
- 2. Temperature Rating**
 -20°C to 80°C / -4°F to 176°F
- 3. Pressure Rating**
 Up to 10 bar (150 psi)
- 4. Weight**
 10.5 kg / 23.1 lb
- 5. Displaced Air Volume Per Stroke**
 1.2 L / 73.2 in³
- 6. Travel Adjustment**
 +/- 5° per stopper bolt for standard

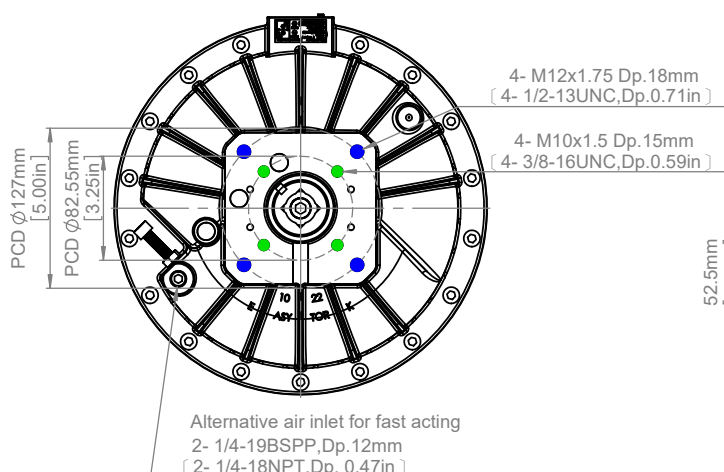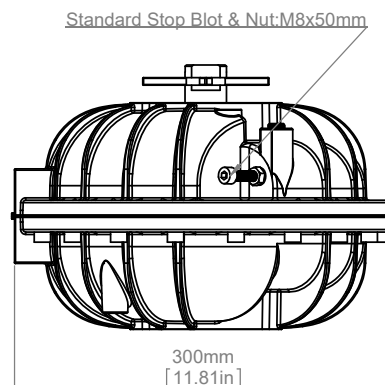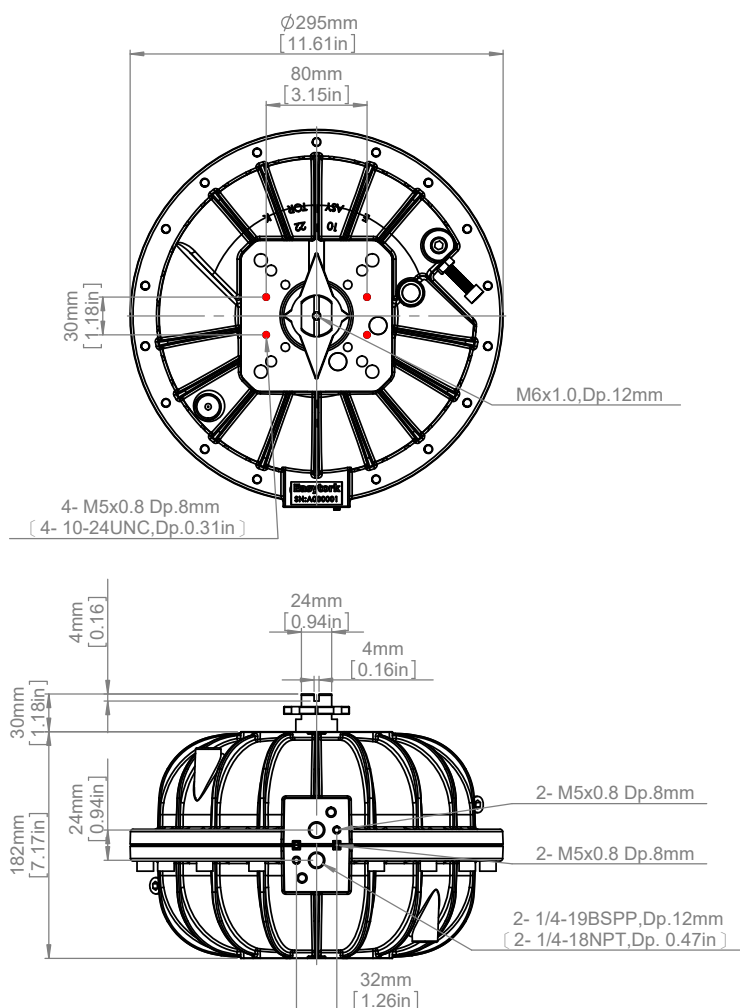

Direct Mount Shaft in EVA
 (Available Space For Valve Stem)

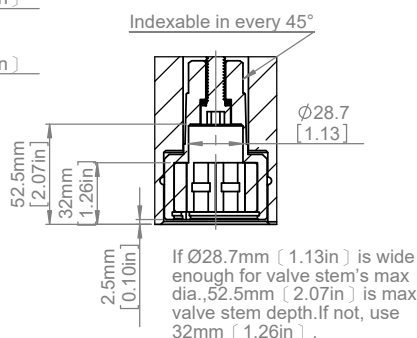

Optional for □17mm(0.67in)
 Optional for □19mm(0.75in)
 Optional for □27mm(1.06in)
 Other shape-available



Actuator shown in full CW position
 Ancillaries attachment size AA2

