


Make your life easier. One actuator for all required functionalities.

Simplifying Your Inventory Complexity: Actuator Functions

	Easytork			Hytork		
	Variation	Options	Conversion Time	Variation	Options	Conversion Time
Actuator Sizes	8	80 psi DA Max = 24,411 in-lb 80 psi FS Max = 15,867 in-lb		12	80 psi DA Max = 28,500 in-lb 80 psi Spring-Return Max = 10,507 in-lb	
Double Acting / Fail-Safe	Same order code	DA, FS	<1 min	2	DA, Spring-Return	>15 min
Fail-Action	Same order code	CW, CCW	<1 min	2	CW, CCW	>25 min
Spring Set Number	Same order code	30-150 psi	0 min	7	40, 50, 60, 70, 80, 90, 100 psi	>15 min
Temperature Range	Same order code	-40 to 248F	0 min	3	-40 to 248F (standard, high, low)	>25 min
Total different SKUs	8 SKUs for all variations			540 SKUs for all variations		

Easytork is the sole warrantor of this product and is NOT affiliated or endorsed by Hytork

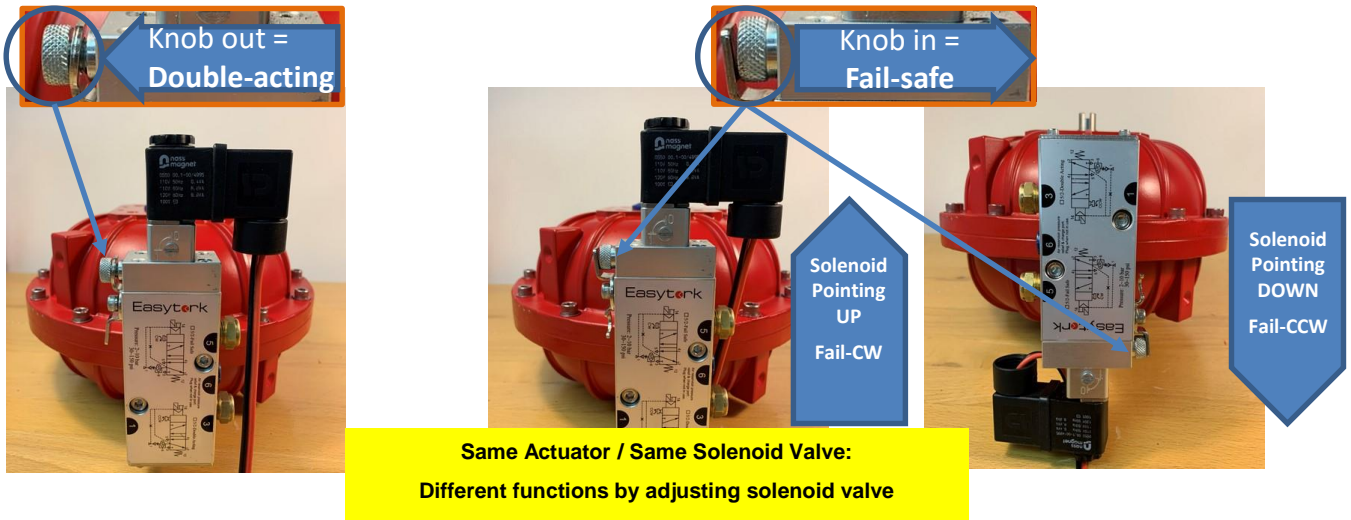


Smaller, Lighter, and More Durable

A smaller & lighter actuator can be used to service the same valve torque requirement. Unlike actuators with springs that have to be increased in size to counteract the spring torque, Easytork uses an on-board air reservoir for fail-safe. No springs means actuator is not fighting spring, **resulting in smaller actuator that will NEVER vacuum in environment air into actuator.**

Easytork vs. Spring & Return Rack & Pinion

Size comparison shows same fail-safe output torque

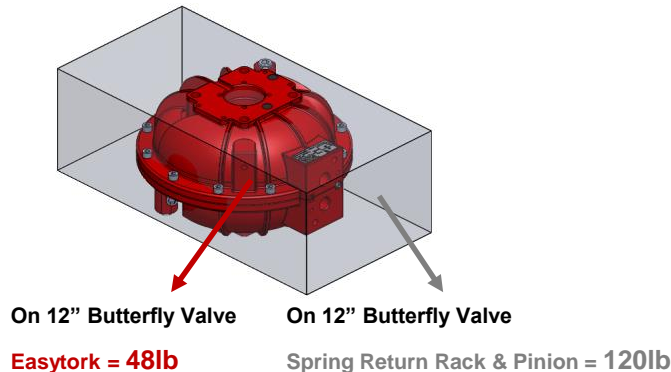


Easytork Teaser

The actuator to DIRECT MOUNT to almost ANY valve.

Simplifying Your Inventory Complexity: Valve Mounting


Limit switch / Positioner Direct Mount

Direct mounts to existing limit switch / positioner regardless of actuator orientation. Both sides have standard VDI/VDE 3845.

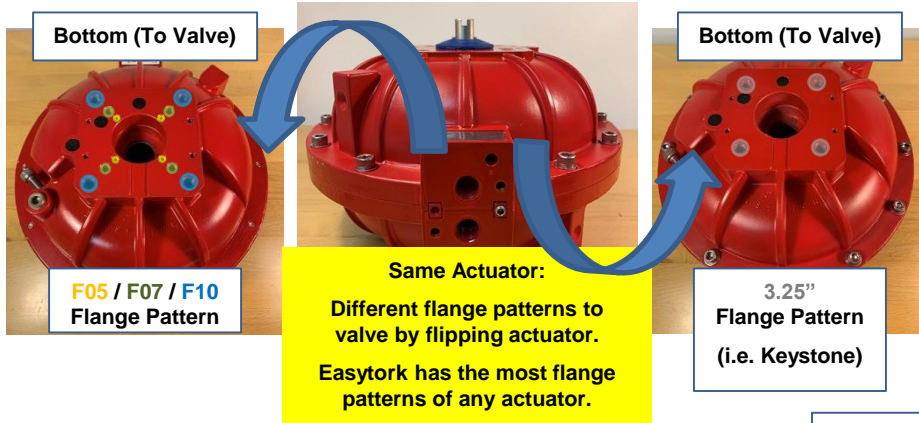

Example shown
EVA-0717

Drive Insert For Any Valve Stem Shape

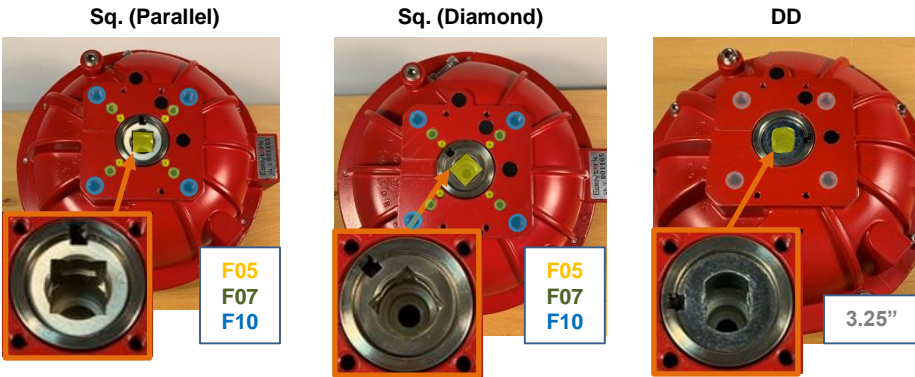

Bottom of actuator can accept various valve stem shapes
(Sq., DD, Bore & Key)

Drive inserts are easy to stock. Stocking a few inserts will allow maximum flexibility and quick turnaround on valve mounting.

Valve Mounting Cost Case Study

	Easytork				Hytork Rack & Pinion			
	Double-Acting		Fail-Safe		Double-Acting		Fail-Safe	
	Note	Insert Cost	Note	Insert Cost	Note	Mounting Cost	Note	Mounting Cost
Butterfly Valve								
4" Keystone Resilient Seat	DM w/ insert	\$40	DM w/ insert	\$40	B&C for mounting	\$90	B&C for mounting	\$90
4" Keystone High Performance	DM w/ insert	\$40	DM w/ insert	\$40	B&C for mounting	\$120	B&C for mounting	\$120
4" Centerline Resilient Seat	DM w/ insert	\$40	DM w/ insert	\$40	B&C for mounting	\$90	B&C for mounting	\$90
Ball Valve								
2" Flo-Tite	DM w/ insert	\$40	DM w/ insert	\$40	B&C for mounting	\$80	B&C for mounting	\$80
2" Sharpe	DM w/ insert	\$40	DM w/ insert	\$40	B&C for mounting	\$80	B&C for mounting	\$80
2" ISO Standard	DM	\$0	DM w/ insert	\$10	DM	\$0	B&C for mounting	\$80
All variation above requires only drive insert					Bracket & coupling requires longer lead time			

Note:

DM = Direct mount

B&C = Bracket and coupling

Easytork is the sole warrantor of this product and is NOT affiliated or endorsed by Keystone, Fisher, Crane, Centerline, Flo-Tite, Sharpe, or Hytork