



Generic Input		Easytork internal use only	
Valve Brand	Centerline	Valve Brand Truncate	CL
Series	200	Series Truncate	200
Input: 1 = mm / 2 = in	2		
Safety Factor	25%		

Actuator Design Year   19

Valve Input

Valve Torque		Direct Mount Check		Section Only For Non Direct Mount ("D.M"), Otherwise Leave Blank						Valve Dimension							
				Bracket Check		Extended Shaft Check		Buyer Preference		Valve Info		Valve Flange		Valve Dimension		Valve Stem Shape and Dimension	
Published valve torque	Incl. safety factor	Any obstruction over flange?		Possible obstruction for std. Easytork bracket?	Out. dia. of obstruction over flange surface	Are bolts for packing gland close to valve stem height?	If bolts interfere with valve stem, what is inside dia. between bolts?	If w/ bracket: How much valve stem capture?	If known, capturable valve stem height	In ISO (i.e. F05)	Flange to top of valve stem	Stem Shape	Valve stem dimension in in or mm	V	V1	V2	Insert orientation when valve is CLOSED. If Sq 1=diamond / 2=square If DD or B+K 1=in line / 2=not in line
Valve Size	in-lb	in-lb	1=Yes / 0=No	1=Yes / 0=No	in/mm	1=Yes / 0=No	in/mm	in/mm	in/mm	in/mm	in/mm	Key	in / mm	in/mm	in/mm	in/mm	1 = Diamond or in line / 2=Square or not in line
2"	106	133	No							2.76	1.25	2	in	0.500	0.394		1
2 1/2"	163	204	No							2.76	1.25	2	in	0.500	0.394		1
3"	220	275	No							2.76	1.25	2	in	0.500	0.394		1
4"	323	404	No							2.76	1.25	2	in	0.625	0.472		1
5"	481	601	No							2.76	1.25	2	in	0.750	0.551		1
6"	691	864	No							2.76	1.25	2	in	0.750	0.551		1
8"	1,183	1,479	No							4.02	1.75	3	in	0.875	0.188	0.188	1
10"	1,872	2,340	No							4.02	1.75	3	in	1.125	0.250	0.250	1
12"	2,795	3,494	No							4.02	1.75	3	in	1.250	0.250	0.250	1
14"	3,070	3,838	No							4.02	1.75	3	in	1.250	0.250	0.250	1
16"	4,880	6,100	No							6.5	2.00	3	in	1.313	0.313	0.313	1
18"	7,243	9,054	No							6.5	2.00	3	in	1.500	0.375	0.375	1
20"	9,180	11,475	No							6.5	2.75	3	in	1.625	0.375	0.375	1
24"	16,813	21,016	No							6.5	2.75	3	in	2.000	0.500	0.500	1
		0															
		0															
		0															
		0															
		0															

Notes:

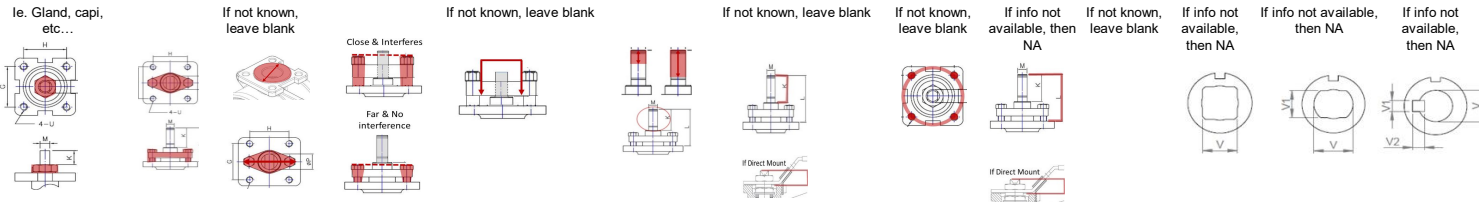

**Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.**

Valve Size	Required Actuator Range	Actuator Torque (Actual torque, no additional safety factor included)				Individual Part Order Code* (All order code required for assembly) (If ordered with the below order codes, Easytork will ship each part as standalone)				Note	Complete Actuator to Valve Order Code*
		DA @ 60PSI	DA @ 80PSI	FS @ 60PSI	FS @ 80PSI	Actuator	Insert	Extended Shaft	Bracket		
2"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-212-0.500x0.394in	P-1-F07-F07-0.24in (order 1)	Valve stem too tall, need F07 spacer plate Direct mount	CL.200.2".0411.19 CL.200.2".0514.19	
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-312-0.500x0.394in				
2 1/2"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-212-0.500x0.394in	P-1-F07-F07-0.24in (order 1)	Valve stem too tall, need F07 spacer plate Direct mount	CL.200.2 1/2".0411.19 CL.200.2 1/2".0514.19	
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-312-0.500x0.394in				
3"	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-212-0.500x0.394in	P-1-F07-F07-0.24in (order 1)	Valve stem too tall, need F07 spacer plate Direct mount	CL.200.3".0411.19 CL.200.3".0514.19	
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-312-0.500x0.394in				
4"	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-312-0.625x0.472in	P-1-F07-F07-0.24in (order 2)	Direct mount Direct mount	CL.200.4".0514.19 CL.200.4".0717.19	
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-412-0.625x0.472in				
5"	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-312-0.750x0.551in	P-1-F07-F07-0.24in (order 2)	Valve stem too tall, need F07 spacer plate Direct mount	CL.200.5".0514.19 CL.200.5".0717.19	
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-412-0.750x0.551in				
6"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-412-0.750x0.551in	P-1-F1012-F1012-0.24in (order 4)	Direct mount Direct mount	CL.200.6".0717.19 CL.200.6".1022.19	
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-512-0.750x0.551in				
8"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-413-0.875x0.188x0.188in	P-1-F1012-F1012-0.24in (order 4)	Valve stem too tall, need F10 spacer plate Direct mount	CL.200.8".0717.19 CL.200.8".1022.19	
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-513-0.875x0.188x0.188in				
10"	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-513-1.125x0.250x0.250in	P-1-F1012-F1012-0.24in (order 3)	Valve stem too tall, need F10 spacer plate Direct mount	CL.200.10".1022.19 CL.200.10".1227.19	
	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.125x0.250x0.250in				
12"	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-513-1.250x0.250x0.250in	P-1-F1012-F1012-0.24in (order 3)	Valve stem too tall, need F10 spacer plate Direct mount	CL.200.12".1022.19 CL.200.12".1227.19	
	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.250x0.250x0.250in				
14"	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-613-1.250x0.250x0.250in	P-1-F1012-F1012-0.24in (order 3)	Direct mount Requires spacer plate to direct mount	CL.200.14".1227.19 CL.200.14".1436.19	
	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-713-1.250x0.250x0.250in				
16"	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-713-1.313x0.313x0.313in	P-1-F1012-F1012-0.24in (order 3)	Direct mount Direct mount	CL.200.16".1436.19 CL.200.16".1646.19	
	EVA-1646	18,308	24,411	11,900	15,867	C-A-8-11-1-111	D-813-1.313x0.313x0.313in				
18"	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-713-1.500x0.375x0.375in	P-1-F1012-F1012-0.24in (order 3)	Direct mount Direct mount	CL.200.18".1436.19 CL.200.18".1646.19	
	EVA-1646	18,308	24,411	11,900	15,867	C-A-8-11-1-111	D-813-1.500x0.375x0.375in				
20"	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-713-1.625x0.375x0.375in	P-1-F1012-F1012-0.24in (order 3)	Direct mount Requires spacer plate to direct mount	CL.200.20".1436.19 CL.200.20".1646.19	
	EVA-1646	18,308	24,411	11,900	15,867	C-A-8-11-1-111	D-813-1.625x0.375x0.375in				
24"	EVA-1646	18,308	24,411	11,900	15,867	C-A-8-11-1-111	D-813-2.000x0.500x0.500in	P-1-F1012-F1012-0.24in (order 3)	Direct mount Direct mount	CL.200.24".1646.19 CL.200.24".1646.19	
	EVA-1646	18,308	24,411	11,900	15,867	C-A-8-11-1-111	D-813-2.000x0.500x0.500in				

**Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.**

**Note\*: Only for actuator and hardware required for mounting to valve. Order auxiliary add-ons (e.g., solenoid valve, lockout & PST, limit switch, chemical resistant adder, etc.) separately. If buyer requires assembly of auxiliary add-ons and/or valve, labor will be charged separately.**