


# Easytork Mounting Bracket Dimensions

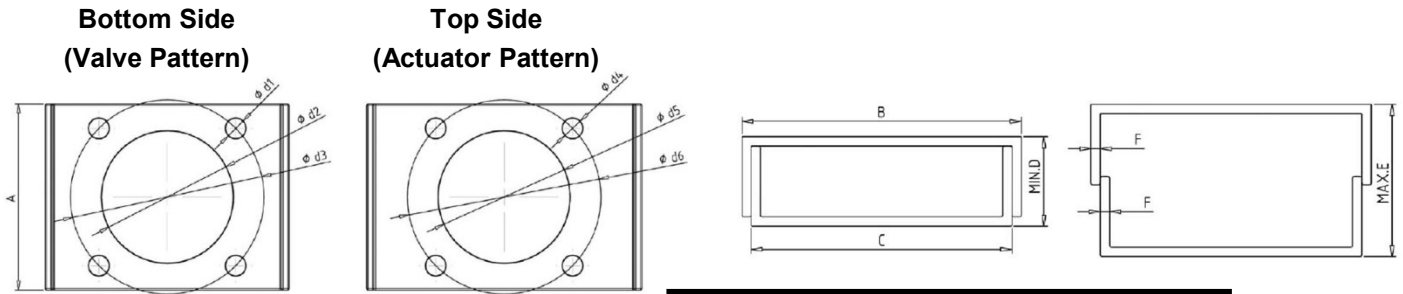

## Metric

Mix and match any Bottom Side and Top Side bracket within the same series.

Bottom Side (ie. Valve Pattern) Availability	Top Side (ie. Actuator Pattern) Availability	Dimensions (mm)											
		Top & Bottom Joint Dimension				Bottom Dimension			Top Dimension				
		A	B	C	F	MIN.D	MAX.E	Ød1	Ød2	Ød3	Ød4	Ød5	Ød6
<b>S Series Bracket</b>		50	66	60	3	30	50						
F03S	F03S							5.3	25	36	5.3	25	36
F04S	F04S							5.3	30	42	5.3	30	42
F05S	F05S							6.4	35	50	6.4	35	50
<b>M Series Bracket</b>		70	100	92	4	42	62						
F03M	F03M							5.3	25	36	5.3	25	36
F04M	F04M							5.3	30	42	5.3	30	42
F05M	F05M							6.4	35	50	6.4	35	50
F07M	F07M							8.4	55	70	8.4	55	70
<b>L Series Bracket</b>		120	150	140	5	52	80						
F07L								8.4	55	70			
F10L	F10L							10.5	70	102	10.5	70	102
F12L	F12L							13.0	85	125	13.0	85	125
<b>XL Series Bracket</b>		160	160	150	5	70	100						
F10XL								10.5	70	102			
F12XL								13.0	85	125			
F14XL	F14XL							17.0	100	140	17.0	100	140

## Imperial

Bottom Side (ie. Valve Pattern) Availability	Top Side (ie. Actuator Pattern) Availability	Dimensions (inch)											
		Top & Bottom Joint Dimension				Bottom Dimension			Top Dimension				
		A	B	C	F	MIN.D	MAX.E	Ød1	Ød2	Ød3	Ød4	Ød5	Ød6
<b>S Series Bracket</b>		1.97	2.60	2.36	0.12	1.18	1.97						
F03S	F03S							0.21	0.98	1.42	0.21	0.98	1.42
F04S	F04S							0.21	1.18	1.65	0.21	1.18	1.65
F05S	F05S							0.25	1.38	1.97	0.25	1.38	1.97
<b>M Series Bracket</b>		2.76	3.94	3.62	0.16	1.65	2.44						
F03M	F03M							0.21	0.98	1.42	0.21	0.98	1.42
F04M	F04M							0.21	1.18	1.65	0.21	1.18	1.65
F05M	F05M							0.25	1.38	1.97	0.25	1.38	1.97
F07M	F07M							0.33	2.17	2.76	0.33	2.17	2.76
<b>L Series Bracket</b>		4.72	5.91	5.51	0.20	2.05	3.15						
F07L								0.33	2.17	2.76			
F10L	F10L							0.41	2.76	4.02	0.41	2.76	4.02
F12L	F12L							0.51	3.35	4.92	0.51	3.35	4.92
<b>XL Series Bracket</b>		6.30	6.30	5.91	0.20	2.76	3.94						
F10XL								0.41	2.76	4.02			
F12XL								0.51	3.35	4.92			
F14XL	F14XL							0.67	3.94	5.51	0.67	3.94	5.51

Note      : Mix and match any Bottom Side and Top Side ISO pattern within the same Series. For example, F03S-F03S, F03S-F04S, F03S-F05S, F04S-F03S, F04S-F04S, F04S-F05S, F05S-F03S, F05S-F04S, F05S-F05S.